3/8" OPTICAL INTERFACE COUPLERS
PART NUMBER: *3030-AB-CDE*

A = *BODY MATERIAL:* [0] 316SS [1] TITANIUM [2] HASTELLOY C 276 [3] MONEL [4] OTHER
B = *PLACE HOLDER:* [0]
C = *LENS:* [0] FUSED SILICA [1] SAPPHIRE [2] BK7
D = *WINDOW:* [0] FUSED SILICA [1] SAPPHIRE
E = *WINDOW SEAL:* [0] VITON [2] KALREZ [3] CHEMRAZ [4] OTHER (SPECIFY)

TYPICAL APPLICATION

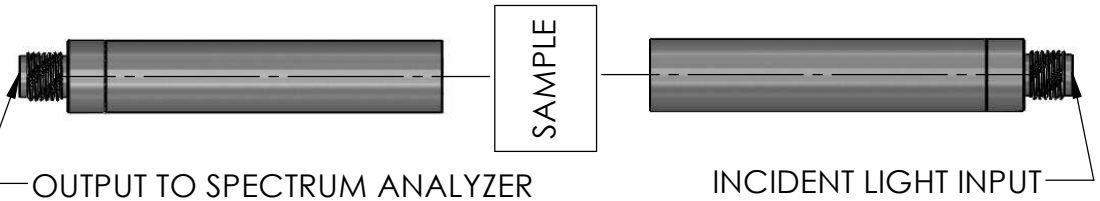

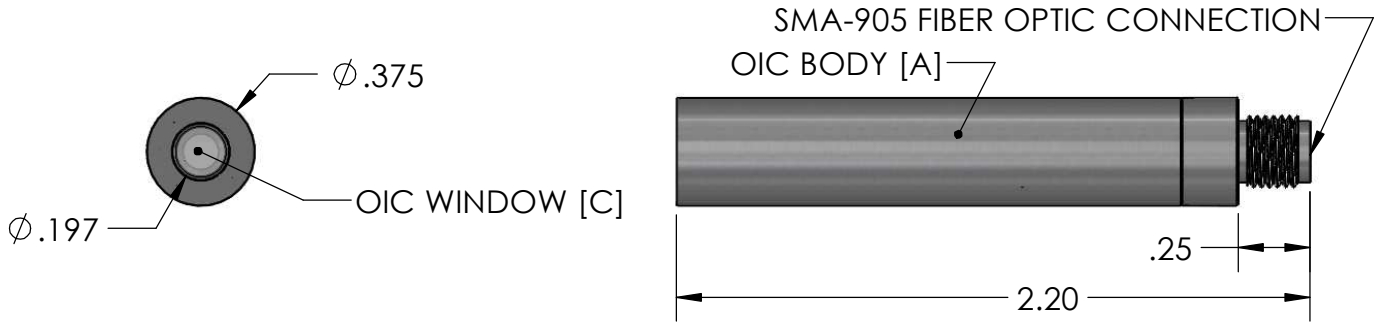

STANDARD SPECIFICATIONS:
PATHLENGTH RANGE: 0.1 - 100 mm
WAVELENGTH RANGE: UV-NIR [220-2400 nm]
FIBER TERMINATIONS: SMA-905
MAX TEMPERATURE: 204C [400F]
MAX PRESSURE: 2000PSI

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES ARE: ANGULAR: ± .3 deg. TWO PLACE DECIMAL ± .03 THREE PLACE DECIMAL ± .005	DRAWN	RJN	20181108
	APPROVED		
	S.O.		
	P.O.		
INTERPRET GEOMETRIC TOLERANCING PERASME Y14.5M	**PROPRIETARY AND CONFIDENTIAL**		
MATERIAL	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CST. ANY REPRODUCTION IN PART OR AS A WHOLEWITHOUT THE WRITTEN PERMISSION OF CST IS PROHIBITED.		
FINISH			
DO NOT SCALE DRAWING			

CUSTOM SENSORS & TECHNOLOGY
A DIVISION OF CUSTOM SAMPLE SYSTEMS INC.
531Axminister Dr. Fenton, MO 63026-2903
(PHONE) 636-305-0666 www.customsensors.com

TITLE:
3/8" OPTICAL INTERFACE COUPLER
3030 SERIES OVERVIEW

SIZE	DWG. NO.	REV
A	3030-AB-CDE	1.00

SCALE: 1:2	WEIGHT:	SHEET 1 OF 1

5 4 3 2 1